



钕玻璃激光器是北京杏林睿光科技有限公司开发的高重频人眼安全激光器，采用半导体封装工艺，体积小、性能稳定，单脉冲能量稳定，光束质量好。

波长 (nm)	1535		
(μJ)	50	20	10
(kHz)	1	2.5	5
(ns)	5	6	8
(A)	5		
(V)	2		
(mm)	0.3		
Typ.(mrad)	16	17	18
	<0.2°		
	TEM ₀₀		
(RMS)	3%		
(g)	10		
(LxWxH,mm)	25x8x7		
()	-40~65		
()	-55~80		

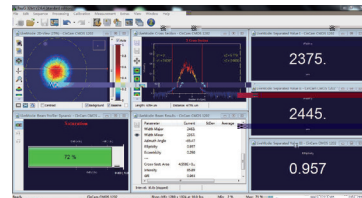

波长(nm)	型号	重复频率(kHz)	脉冲宽度(ns)	单量(J)	尺寸(mm)
1535	R1535-1-5-50-F2A	1	5	50	25x8x7
	R1535-2.5-6-20-F2A	2.5	6	20	25x8x7
	R1535-5-8-10-F2A	5	8	10	25x8x7

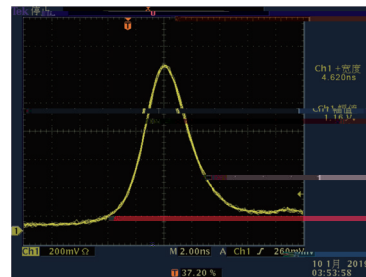